
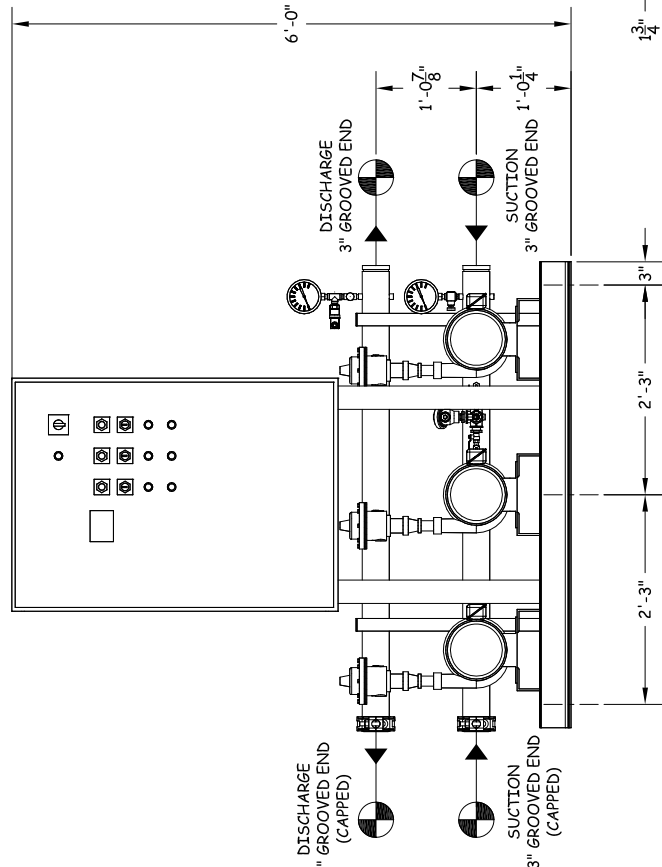
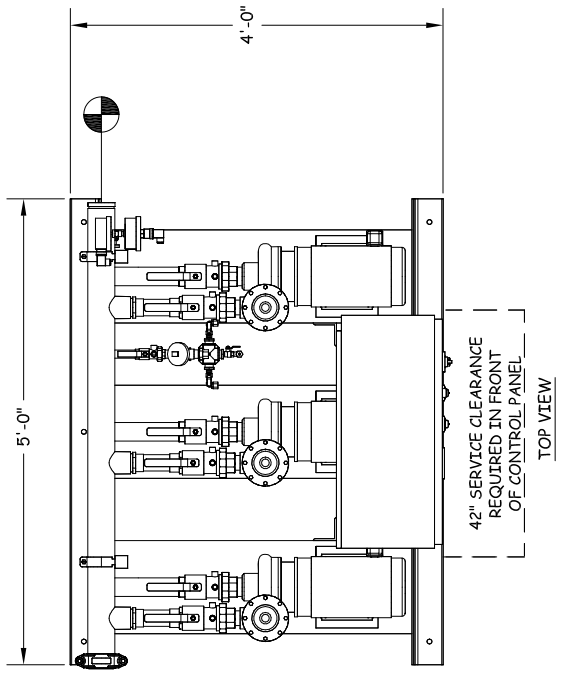


RELIEF VALVES AND EQUIPMENT DRAINS TO BE PIPED TO DRAIN OR TO A SINK PER CODE REQUIREMENT.

ALL BOLTING AND ANCHORAGE TO BE IN COMPLIANCE WITH LOCAL CODES AND ANY SEISMIC REQUIREMENTS.

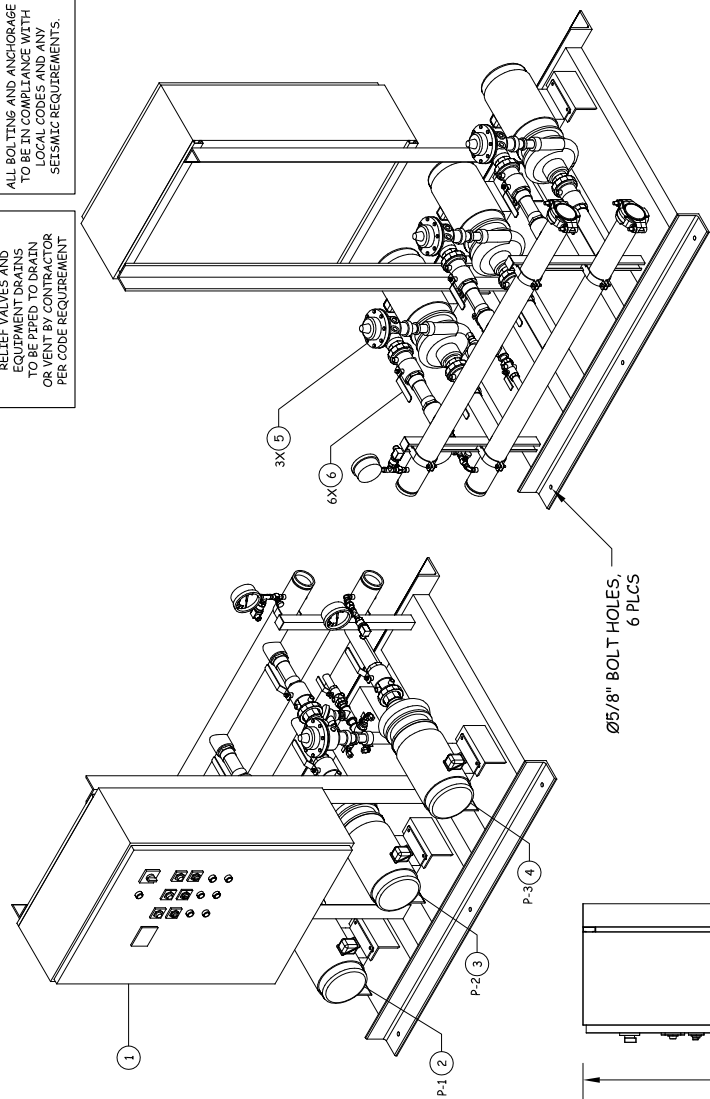

RIGHT END VIEW

FRONT VIEW

- GPM		- PSI		- PSI						
TOTAL FLOW		TOTAL DISCHARGE PRESSURE		AVAILABLE PRESSURE						
TOTAL SYSTEM CAPACITY										
3	P-3	600LBS	1 X 2-7	-	7 1/2	3500	460 / 60 / 3	TEFC/P.E.		
2	P-2	600LBS	1 X 2-7	-	7 1/2	3500	460 / 60 / 3	TEFC/P.E.		
1	P-1	600LBS	1 X 2-7	-	7 1/2	3500	460 / 60 / 3	TEFC/P.E.		
ITEM	TAG	MANUFACTURER	SERIES	MODEL	GPM	TDH	HP	RPM	VOLTS/HZ/PH	ENCLOSURE

- GPM		- PSI		- PSI						
TOTAL FLOW		TOTAL DISCHARGE PRESSURE		AVAILABLE PRESSURE						
TOTAL SYSTEM CAPACITY										
3	P-3	600LBS	1 X 2-7	-	7 1/2	3500	460 / 60 / 3	TEFC/P.E.		
2	P-2	600LBS	1 X 2-7	-	7 1/2	3500	460 / 60 / 3	TEFC/P.E.		
1	P-1	600LBS	1 X 2-7	-	7 1/2	3500	460 / 60 / 3	TEFC/P.E.		
ITEM	TAG	MANUFACTURER	SERIES	MODEL	GPM	TDH	HP	RPM	VOLTS/HZ/PH	ENCLOSURE

FLOWTHERM systems
HAYWARD, CALIFORNIA

PROJECT NAME:
CUSTOMER:
DRAWN BY DATE: 12/23/14
CHECKED BY: APPROVED BY:
TOLERANCES UNLESS OTHERWISE SPECIFIED:
DEC. .500" FRACTIONAL ANGLE 5° SCALE 1" = 1'-0"

THIS DRAWING AND THE INFORMATION DEPICTED THEREIN IS THE PROPERTY OF FLOWTHERM SYSTEMS, A DIVISION OF CHC. COPIES ARE ISSUED IN STRICT CONFIDENCE AND ARE NOT TO BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURING OR SALE OF PRODUCT WITHOUT PRIOR WRITTEN PERMISSION OF CHC.

UL LISTED
PACKAGED PUMPING SYSTEMS & HEAT TRANSFER SYSTEMS

APPROXIMATE SHIPPING WEIGHT: 1,374 LBS
APPROXIMATE OPERATING WEIGHT: 1,447 LBS

GENERAL NOTES:
(1) SINGLE POINT POWER CONNECTION AT CONTROL PANEL.
(2) HYDRO PRESSURE CHECK AT 125 PSI.
(3) ASSEMBLED SYSTEM TO BE PAINTED WITH INDUSTRIAL MACHINE ENAMEL PRIOR TO SHIPMENT.

= DENOTES CONTRACTOR POINT OF CONNECTION