


RELIEF VALVES AND ANCHORAGE EQUIPMENT DRAINS TO BE IN COMPLIANCE WITH LOCAL CODES AND ANY SEISMIC REQUIREMENTS.

RELIEF VALVES AND ANCHORAGE EQUIPMENT DRAINS TO BE IN COMPLIANCE WITH LOCAL CODES AND ANY SEISMIC REQUIREMENTS.

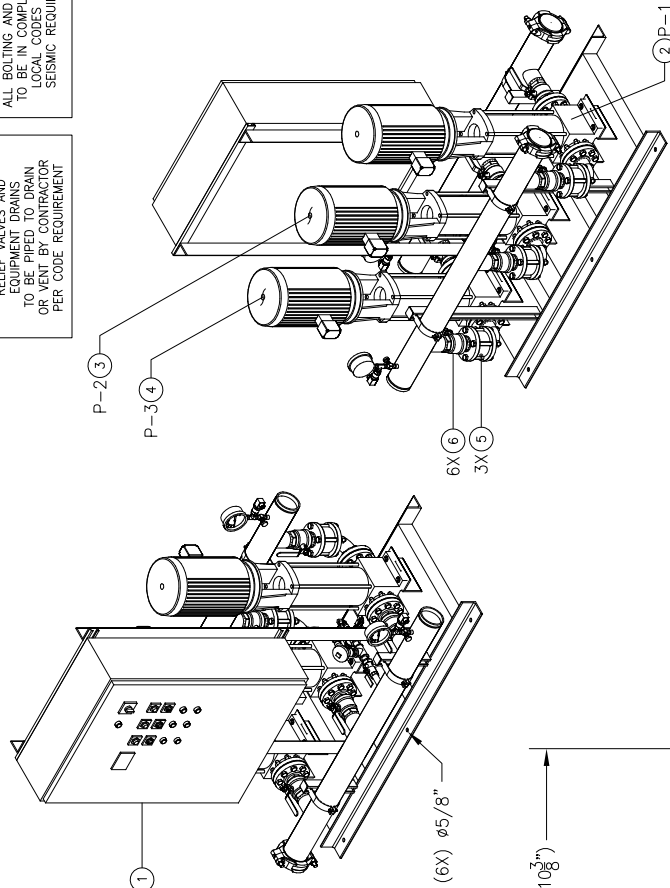

CONSTRUCTION NOTES:
 1. SUCTION AND DISCHARGE HEADERS ARE GROOVED ON BOTH ENDS.
 2. END CAPS CAN BE PLACED ON EITHER END OF HEADERS.
 3. SYSTEM DESIGNED FOR INDOOR INSTALLATION.

-GPM	-PSI	-PSI	AVAILABLE PRESSURE
TOTAL FLOW	TOTAL DISCHARGE PRESSURE	TOTAL SYSTEM CAPACITY	
4	15	3500	460 / 60 / 3
3	15	3500	460 / 60 / 3
2	15	3500	460 / 60 / 3

ITEM	TAG	MANUFACTURER	SERIES	MODEL	GPM	TDH	HP	RPM	VOLTS/PH/PH	ENCLOSURE
10	-	-	-	-	-	-	-	-	-	-
9	-	-	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-	-	-
7	-	-	-	-	-	-	-	-	-	-
6	6	-	-	BALL VALVE	-	-	-	-	-	-
5	3	-	-	VAL-MATIC WAFER CHECK VALVE	-	-	-	-	-	-
4	1	P-3	GOULDS	ESV MULTI-STAGE PUMP	MODEL 15SVG-8	-	-	-	-	-
3	1	P-2	GOULDS	ESV MULTI-STAGE PUMP	MODEL 15SVG-8	-	-	-	-	-
2	1	P-1	GOULDS	ESV MULTI-STAGE PUMP	MODEL 15SVG-8	-	-	-	-	-
1	1	-	-	AQUALOGIC XL CONTROL PANEL	-	-	-	-	-	-

ITEM	QTY	TAG	DESCRIPTION
10	-	-	-
9	-	-	-
8	-	-	-
7	-	-	-
6	6	-	BALL VALVE - 2"
5	3	-	VAL-MATIC WAFER CHECK VALVE - 2"
4	1	P-3	GOULDS ESV MULTI-STAGE PUMP MODEL 15SVG-8
3	1	P-2	GOULDS ESV MULTI-STAGE PUMP MODEL 15SVG-8
2	1	P-1	GOULDS ESV MULTI-STAGE PUMP MODEL 15SVG-8
1	1	-	AQUALOGIC XL CONTROL PANEL

EQUIPMENT SCHEDULE			
PROJECT NAME:	-		
CUSTOMER:	-		
DRAWN BY DATE:	04/04/18	CHECKED BY:	APPROVED BY:
TOLERANCES UNLESS OTHERWISE SPECIFIED:	-		
DEC.:	.500"	ANGLE:	1" = 1'-0"
FRAC.:	1/2"	SCALE:	1" = 1'-0"
REV	1	DRAWING NO.	FW3.1-8-XL
		FAB NO.	-
		DRAWING TITLE:	FW3.1-8-XL - VARIABLE SPEED TRIPLEX PRESSURE BOOSTER

THIS DRAWING AND THE INFORMATION SPECIFIED THEREIN ARE THE PROPERTY OF FLOWTECH SYSTEMS, A DIVISION OF CHC. COPIES ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE LOANED, REPRODUCED, COPIED, OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF CHC.

LISTED
 PACKAGED PUMPING SYSTEMS & HEAT TRANSFER SYSTEMS

UL

APPROXIMATE SHIPPING WEIGHT: 1,600 LBS.
 APPROXIMATE OPERATING WEIGHT: 1,682 LBS.

GENERAL NOTES:
 (1) SINGLE POINT POWER CONNECTION AT CONTROL PANEL.
 (2) HYDRO PRESSURE CHECK AT 125 PSI.
 (3) ASSEMBLED SYSTEM TO BE PAINTED WITH INDUSTRIAL MACHINE ENAMEL PRIOR TO SHIPMENT.

= DENOTES CONTRACTOR POINT OF CONNECTION

